



TO-66-W


Features


- Base diameter 2-3/8"
- Use for wall stop, wall diverter or deck diverter Rough valve (50W-R, 75-W-R, WDV-R, DDV-R)
- sold separately All brass construction
- Over 30 finishes including 13 PVD finishes

Codes/Standards Applicable Product meets or exceeds the following: • ASME A112.18.1/CSA B125.1

- ADA compliant



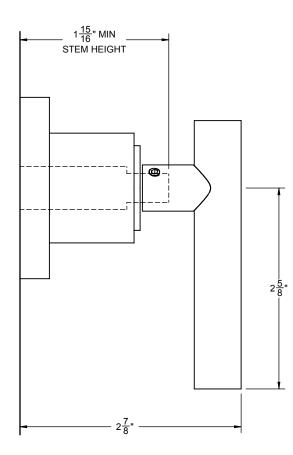

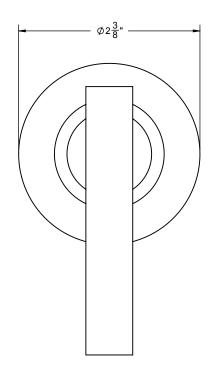

THROUGH-HOLE SPECIFICATIONS		
MIN	RECOMMENDED	MAX
Ø1"	Ø 1-3/8"	Ø1-1/2"

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

ALL DIMENSIONS SHOWN TO NEAREST 1/16"