



PERCY®

SINGLE LEVER AND VESSEL FAUCETS



- Cast brass spout and body
- Distinct, geometric handle design
- 3/8" compression braided, stainless steel flexible supply hose
- Speed Connect® with 1-1/4" drain
- Lead Free—faucet contains $\leq 0.25\%$ total lead content by weighted volume
- Maximum flow rate: 1.5 gpm (5.7 L/min)
- Low flow rate: 1.2 gpm (4.5 L/min)

CODES AND STANDARDS

Meets or Exceeds ASME A112.18.1/ CSA B125.1, NSF 61/Section 9

EPA WaterSense® Certified

Certified Compliant with $\leq 0.25\%$ Weighted Average Lead Content Regulations

CEC and CALGreen® Compliant

AVAILABLE FINISHES

Polished Chrome
Brushed Nickel

FINISH CODE

100
144

DESCRIPTION

1.5 gpm (5.7 L/min)
Single Lever Faucet

- Loop Handle
- Stem Handle (ADA only)

Vessel Faucet

- Loop Handle
- Stem Handle (ADA only)

1.2 gpm (4.5 L/min)
Single Lever Faucet

- Loop Handle
- Loop Handle with Grid Drain
- Stem Handle (ADA only)

Vessel Faucet

- Loop Handle
- Stem Handle (ADA only)
- Stem Handle with Grid Drain (ADA only)


PRODUCT NUMBER

- ★ D35105104.XXX
- ★ D35105100.XXX
- ★ D35105154.XXX
- ★ D35105150.XXX

D3510512C.XXX
D35105157.XXX
D3510510C.XXX

D3510517C.XXX
D3510515C.XXX
D35105152.XXX

ROUGH-IN DIAGRAM
SHOWN ON NEXT PAGE



★DISCONTINUED. Available while supplies last.


CALGreen® is a registered trademark of California Building Standards Commission.

Meets the Americans with Disabilities Act Guidelines and ANSI A117.1 Requirements for the physically challenged.



PERCY[®]

SINGLE LEVER AND VESSEL FAUCETS

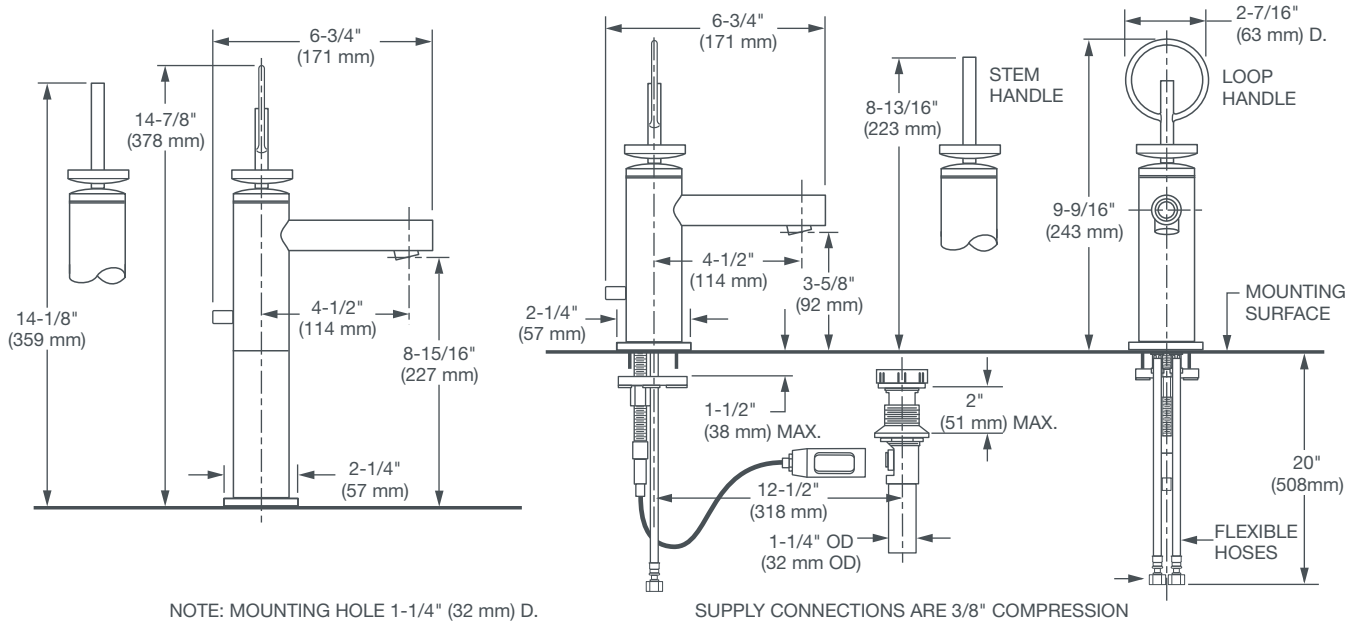

IMPORTANT: These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

PART OF **LIXIL**