

Features


- · Dimmable LED task lighting
- · Integrated touch sensor control with memory
- Energy efficient LED lighting 6000K
- 1800 Lumens
- CRI 90+
- Integrated Defogger

Construction

- · Quality polished edge mirror
- · Single phase wire installation
- 5 MM Silver Backed Copper Free
- Installation Either Surface Mount (Side Mirror Trim Panels included) or Recessed
- Includes installation hardware

Codes/Standards Applicable

- Conforms to UL Std. 962
- Cert. to CSA Std. C22.2 No.250.0-08
- ETL Intertek 5004931

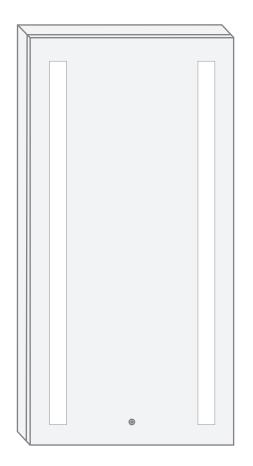

Electrical System

- 120Vac, 60Hz, 31W
- Electric Current: 0.26A
- Wattage: 31W

Model


Kinetic 1530L Left Swinging Door


Outlet

- Performance Requirements: Contains the required Supervisory Circuit with the Auto-Monitoring Function as noted by UL 1310
- Input Voltage: Min 112Vac, Nom 125Vac, Max 137Vac
- Frequency: 60Hz
- Front Receptacle Current: 102-132VAC Nominal 15A
- USB Output Current: 5VDC Nominal 4A




CABINET CONFIGURATION



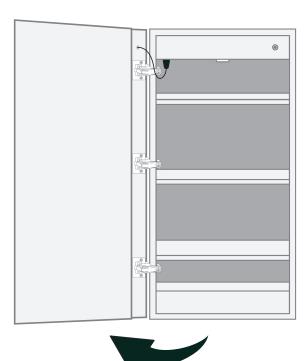




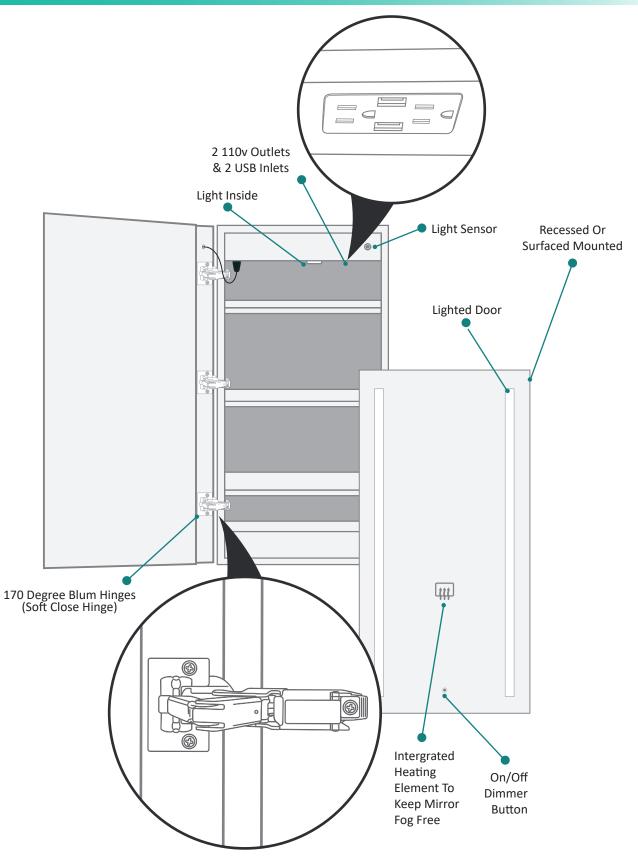



SURFACE MOUNT

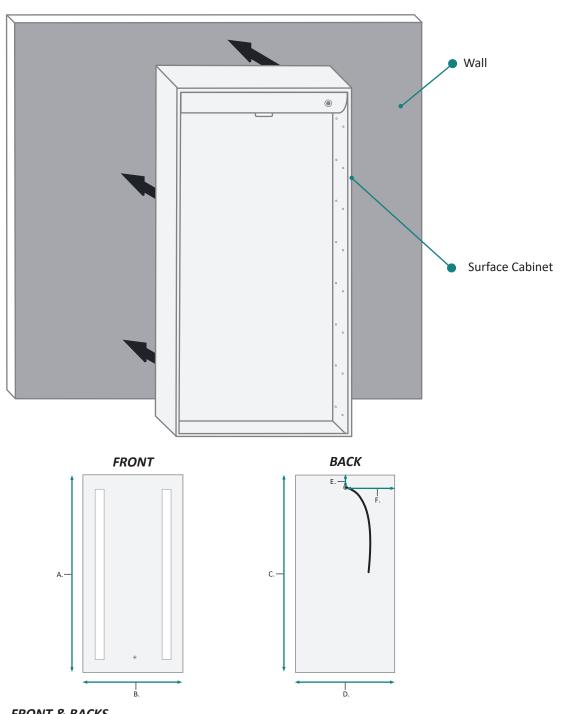


FRONT & BACKS

MODEL	А	В	С	D	Е	F
KINETIC1530L	30	15	30	15	1-1/8	10




RECESS MOUNT

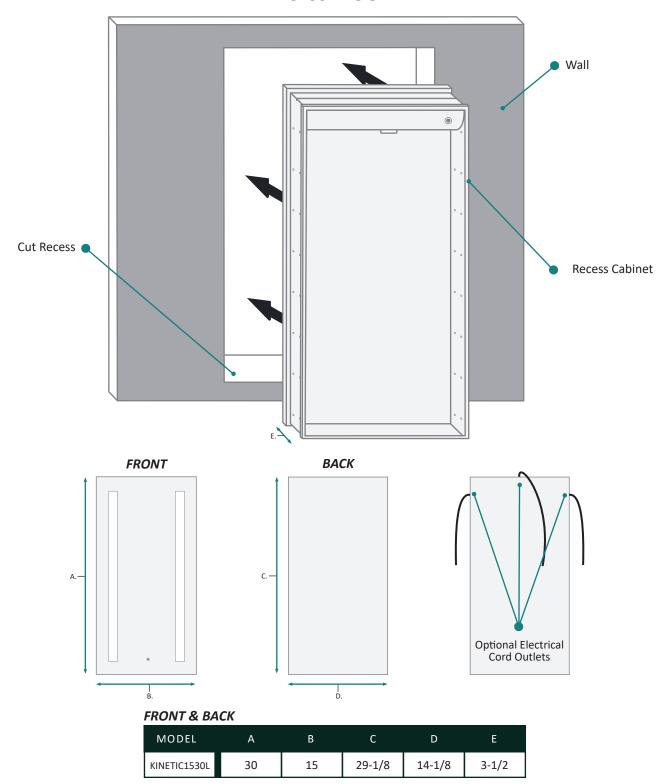




RECESS INSTALLATION OPTIONAL ELECTRICAL CORD LOCATIONS

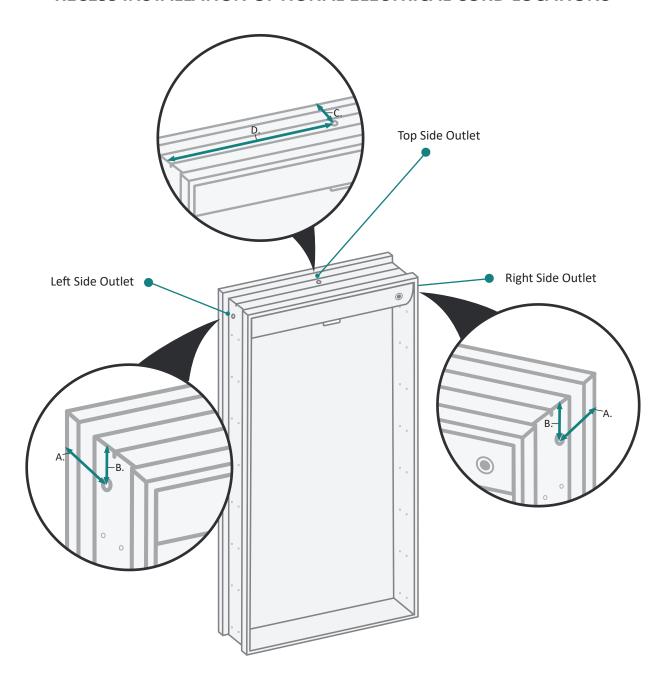

ELECTRICAL CORD LOCATIONS


MODEL	А	В	С	D	
KINETIC1530L	1-1/8	1-1/8	1-1-8	12	





DOOR & CABINET

MODEL	А	В	С	
KINETIC1530L	7/8	3-1/2	5	

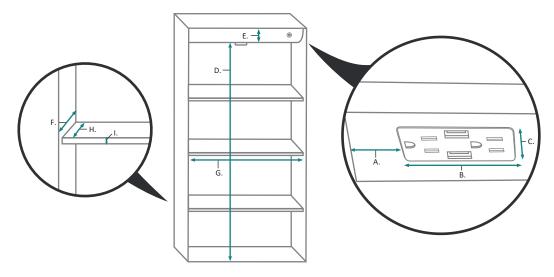

INTERIOR CABINET

MODEL	Α	В	С	D	Е	F	G	Н	1
KINETIC1530L	3-3/4	5-5/8	1-1/4	27-3/4	2-1/4	3-5/8	13-1/4	2-3/8	3/8