

Featuring timeless design that has become an icon of European style, this chimney hood offers bright LED lighting that illuminates the cooktop.

SIZE	MODEL NO.	GREASE FILTERS (replacement)	NON-DUCTED CHARCOAL FILTERS
29-1/2-in.	BW5030SSL	S97018027 (set of 2)	ROUNDFILTER
35-7/16-in.	BW5036SSL	S97018028 (set of 3)	ROUNDFILTER

HVI PERFORMANCE									
Duct Orientation	Size	Damper	Sones			CFM			
			Normal	Medium*	High	Normal	Medium*	High 0.25 in. w.g.	High 0.1 in. w.g.
Round - Vertical	6 in.	Included	1.5	3.5	8.0	130	220	330	350

FEATURES	
Max. Blower Airflow	380 CFM*
Finish	430 Stainless Steel no. 4 Brushed
Wall Mount	Yes
Telescopic Flue	Yes - Accomodates 8-ft. to 9-ft. ceilings
Convertible to non-ducted operation	Yes - Non-Duct Kit RK58 sold separately
Blower type	Single, Centrifugal
Cord-connected	Yes
Control type	5-Pushbuttons <ul style="list-style-type: none"> <li>• Blower on-off</li> <li>• Blower low speed</li> <li>• Blower medium speed</li> <li>• Blower high speed</li> <li>• Light on-off</li> </ul>
Lighting	2 x LED Modules 5.5 W, (included)
Grease Filters	Dishwasher-safe with quick-release latch



AC INPUT	
120V, 60 Hz - 2.6 AMPS	

OPTIONAL ACCESSORIES (sold separately)	
Flue Extension for 10-ft. ceiling	FXN58SS
Non-Duct Kit	RK58

MINIMUM MOUNTING HEIGHT	
30-in. from cooktop to bottom of hood	

LIMITED WARRANTY	
1-year	

**FOR INDOOR USE ONLY**

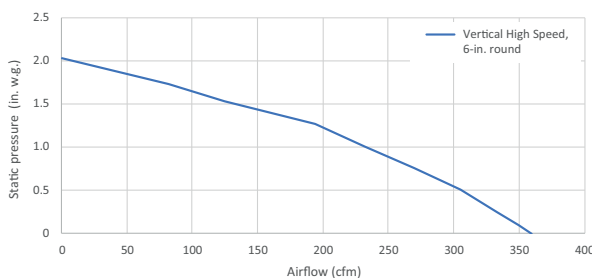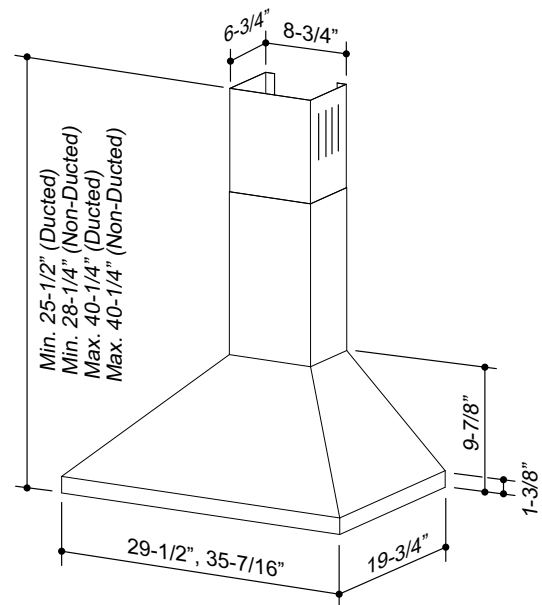

HVI-2100 CERTIFIED RATINGS comply with new testing technologies and procedures prescribed by the Home Ventilating Institute, for off-the-shelf products, as they are available to consumers. Product performance is rated at 0.1 in. static pressure, based on tests conducted in AMCA's state-of-the-art test laboratory. Sones are a measure of humanly-perceived loudness, based on laboratory measurements. \* Where noted performance rating is not HVI certified but was established in accordance with HVI Standardized test procedure.