







JOB	
AREA	
ITEM NO.	
MODEL NO.	







Glass Door Model

MODELS	DESCRIPTION		
HP15WS-4-1R/L	Indoor Signature Series Wine Reserve Solid Stainless Steel Door		
HP15WS-4-2R/L	Indoor Signature Series Wine Reserve Solid Panel Ready Door		
HP15WS-4-3R/L	Indoor Signature Series Wine Reserve Stainless Steel Glass Door		
HP15WS-4-4R/L	Indoor Signature Series Wine Reserve Panel Ready Glass Door		
HP15WO-4-1R/L	Outdoor Signature Series Wine Reserve Solid Stainless Steel Door		
HP15WO-4-2R/L	Outdoor Signature Series Wine Reserve Solid Panel Ready Door		
HP15WO-4-3R/L	Outdoor Signature Series Wine Reserve Stainless Steel Glass Door		
HP15WO-4-4R/L	Outdoor Signature Series Wine Reserve Panel Ready Glass Door		
HP15WM-4-1R/L	Marine Signature Series Wine Reserve Solid Stainless Steel Door		
HP15WM-4-2R/L	Marine Signature Series Wine Reserve Solid Panel Ready Door		
HP15WM-4-3R/L	Marine Signature Series Wine Reserve Stainless Steel Glass Door		
HP15WM-4-4R/L	Marine Signature Series Wine Reserve Panel Ready Glass Door		

KEY PRODUCT FEATURES AND BENEFITS

- 1000 BTU/hr capacity delivers industry's most energy efficient cool down, indoors or outdoors
- Up to 70% faster cooling speeds than leading competitor
- Variable speed compressor minimizes sound; up to 30% quieter than competitors
- Commercial-grade all stainless steel interior and exterior provide superior durability and easy cleaning
- Perlick Anti-Condensation System™ eliminates condensation from forming on the cabinet (Outdoor and Marine models only)
- Marine & Coastal Grade with Perlick Armor™ upgrades stainless steel, fasteners, and refrigeration system to the highest blend of corrosion resistance and food safety

Quick Features:

- Wine shelves fully extend on vibration dampened, stainless steel ball-bearing glides; stainless steel wine shelves will not absorb odors over time
- Industry's best full 6 year warranty for owner ease of mind
- Available with stainless steel or panel ready doors to match your design style
- Audible door alarm warns user if door is held open
- Selectable blue or white LED lighting
- R600a Natural Refrigerant offers maximum energy efficiency with zero global warming potential
- Storage for up to 20 bottles of wine



MODEL NUMBERS		HP15WS	HP15WO	HP15WM
MODEL DESCRIPTION		15″ Indoor Wine Reserve	15" Outdoor Wine Reserve	15" Marine/Coastal Wine Reserve
ATTRIBUTES				
Perlick Anti-Condensation System		NO	YES	YES
Perlick Armor™		NO	NO	YES
	Width - in. (mm)	14-7/8" (378 mm.)	14-7/8" (378 mm.)	14-7/8" (378 mm.)
OVERALL DIMENSIONS	Depth - in. (mm)	24" (610 mm.)	24" (610 mm.)	24" (610 mm.)
	Height - in. (mm)	34-1/4" (870 mm.)	34-1/4" (870 mm.)	34-1/4" (870 mm.)
	Width - in. (mm)	15" (381 mm.)	15" (381 mm.)	15" (381 mm.)
STANDARD OPENING DIMENSIONS	Depth - in. (mm)	24-7/8" (632 mm.)	24-7/8" (632 mm.)	24-7/8" (632 mm.)
	Height - in. (mm)	34-1/2" (876 mm.)	34-1/2" (876 mm.)	34-1/2" (876 mm.)
INTERNAL VOLUME Net. Cu. Ft.		2.8 cu. ft	2.8 cu. ft	2.8 cu. ft
SHIPPING WEIGHT Lbs. (kg.)		175 lbs (79.38 kg)	175 lbs (79.38 kg)	175 lbs (79.38 kg)
	Electrical Supply	115 VAC/60 Hz/1 Ph	115 VAC/60 Hz/1 Ph	115 VAC/60 Hz/1 Ph
ELECTRICAL SPECIFICATIONS	Running Load Amps	1.7 amps	1.7 amps	1.7 amps
	Electrical Connection	Cord connected	Cord connected	Cord connected
	Cord Plug Type	NEMA 3 Prong 5-15P	NEMA 3 Prong 5-15P	NEMA 3 Prong 5-15P
	Cord Length	6′	6′	6′
	Defrost Initiation	Automatic	Automatic	Automatic
	Defrost Type	Off cycle	Off cycle	Off cycle
	Thermostat	Digital	Digital	Digital
	Lighting Type	LED	LED	LED
	Refrigerant	R600a (44g)	R600a (44g)	R600a (44g)
REFRIGERATION SPECIFICATIONS	Expansion Device	Capillary Tube	Capillary Tube	Capillary Tube
	Temperature Settings F°(C°)	45° (7.2°) - 65° (18.33°) Factory Set Point 36° (2.2°)	45° (7.2°) - 65° (18.33°) Factory Set Point 36° (2.2°)	45° (7.2°) - 65° (18.33°) Factory Set Point 36° (2.2°)
	Heat Rejection (at 75°F)	300 BTU/hr	300 BTU/hr	300 BTU/hr
	Pull Down Capacity	1000 BTU/hr	1000 BTU/hr	1000 BTU/hr
	Front Vented	Yes	Yes	Yes
PLUMBING		None Required	None Required	None Required

Installation Notes: To achieve 24" install depth, place electrical connection adjacent to the installation cavity.

ACCESSORIES

MODEL NOS.	DESCRIPTION	
(L)	Factory Installed Lock	
67990-L/R	Stacking Kit for HP15 models	
66736-15	Caster Kit for HP15 models	
67115-15	Wood Faces for Wine Shelves (5/pk)	

Perlick accessories are available for purchase through an authorized Perlick dealer. For a full list of accessories and to find a dealer near you, visit **perlick.com.**




15" SIGNATURE SERIES Wine Reserve

custo	MER MODEL NUMBER	REGULATORY MODEL NUMBER	Hinge Side	Lock
HP15V	/S-4-1L	HP15WS4F-00-SLF0W	Left	No
HP15V	/S-4-1R	HP15WS4F-00-SRF0W	Right	No
HP15V	/S-4-2L	HP15WS4F-00-PL00W	Left	No
HP15V	/S-4-2R	HP15WS4F-00-PR00W	Right	No
HP15V	HP15W5-4-3L HP15WS-4-3R HP15WS-4-4L	HP15WS4F-00-TLF0W	Left	No
HP15V		HP15WS4F-00-TRF0W	Right	No
HP15V		HP15WS4F-00-RL00W	Left	No
HP15V	/S-4-4R	HP15WS4F-00-RR00W	Right	No
HP15V	/S-4-1LL	HP15WS4F-00-SLFLW	Left	Yes
	/S-4-1RL	HP15WS4F-00-SRFLW	Right	Yes
HP15V	/S-4-2LL	HP15WS4F-00-PL0LW	Left	Yes
HP15V	/S-4-2RL	HP15WS4F-00-PR0LW	Right	Yes
HP15V	/S-4-3LL	HP15WS4F-00-TLFLW	Left	Yes
HP15V	/S-4-3RL	HP15WS4F-00-TRFLW	Right	Yes
HP15V	/S-4-4LL	HP15WS4F-00-RL0LW	Left	Yes
HP15V	/S-4-4RL	HP15WS4F-00-RR0LW	Right	Yes
HP15V	/O-4-1L	HP15WO4F-00-SLF0W	Left	No
HP15V	/O-4-1R	HP15WO4F-00-SRF0W	Right	No
HP15V	/O-4-2L	HP15WO4F-00-PL00W	Left	No
HP15V	/O-4-2R	HP15WO4F-00-PR00W	Right	No
HP15V	/O-4-3L	HP15WO4F-00-TLF0W	Left	No
HP15V	/O-4-3R	HP15WO4F-00-TRF0W	Right	No
HP15V	/O-4-4L	HP15WO4F-00-RL00W	Left	No
HP15W	/O-4-4R	HP15WO4F-00-RR00W	Right	No
HP15W	/O-4-1LL	HP15WO4F-00-SLFLW	Left	Yes
	/O-4-1RL	HP15WO4F-00-SRFLW	Right	Yes
HP15V	/O-4-2LL	HP15WO4F-00-PL0LW	Left	Yes
HP15V	/O-4-2RL	HP15WO4F-00-PR0LW	Right	Yes
HP15V	/O-4-3LL	HP15WO4F-00-TLFLW	Left	Yes
HP15V	/O-4-3RL	HP15WO4F-00-TRFLW	Right	Yes
HP15V	/O-4-4LL	HP15WO4F-00-RL0LW	Left	Yes
HP15V	/O-4-4RL	HP15WO4F-00-RR0LW	Right	Yes
HP15V	/M-4-1L	HP15WM4F-00-MLF0W	Left	No
HP15V	/M-4-1R	HP15WM4F-00-MRF0W	Right	No
HP15V	/M-4-2L	HP15WM4F-00-PL00W	Left	No
HP15V	/M-4-2R	HP15WM4F-00-PR00W	Right	No
HP15V	/M-4-3L	HP15WM4F-00-NLF0W	Left	No
HP15V	/M-4-3R	HP15WM4F-00-NRF0W	Right	No
HP15V	/M-4-4L	HP15WM4F-00-RL00W	Left	No
HP15W HP15W HP15W HP15W	/M-4-4R	HP15WM4F-00-RR00W	Right	No
HP15V	/M-4-1LL	HP15WM4F-00-MLFLW	Left	Yes
HP15W	/M-4-1RL	HP15WM4F-00-MRFLW	Right	Yes
HP15V	/M-4-2LL	HP15WM4F-00-PL0LW	Left	Yes
HP15V	/M-4-2RL	HP15WM4F-00-PR0LW	Right	Yes
HP15V	/M-4-3LL	HP15WM4F-00-NLFLW	Left	Yes
HP15V	/M-4-3RL	HP15WM4F-00-NRFLW	Right	Yes
HP15V	/M-4-4LL	HP15WM4F-00-RL0LW	Left	Yes
HP15V	/M-4-4RL	HP15WM4F-00-RR0LW	Right	Yes

Form No. Z2689 Rev 04.12.2022



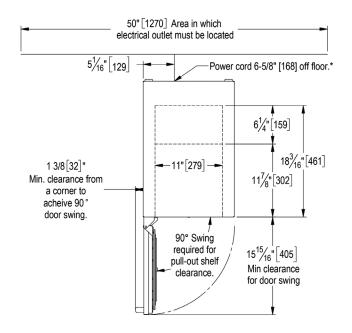

* - Leg leveler can add 3/4" [19] to these dimensions when fully extended.

