



24" SIGNATURE SERIES
Freezer Drawers



eco friendly
R600a Refrigerant



JOB	
AREA	
ITEM NO.	
MODEL NO.	



Drawer Model

MODELS	DESCRIPTION
HP24FS-4-5	Indoor Signature Series Freezer Drawers with Stainless Steel Drawers
HP24FS-4-6	Indoor Signature Series Freezer Drawers with Panel Ready Drawers
HP24FO-4-5	Outdoor Signature Series Freezer Drawers with Stainless Steel Drawers
HP24FO-4-6	Outdoor Signature Series Freezer Drawers with Panel Ready Drawers
HP24FM-4-5	Marine Signature Series Freezer Drawers with Stainless Steel Drawers
HP24FM-4-6	Marine Signature Series Freezer Drawers with Panel Ready Drawers

KEY PRODUCT FEATURES AND BENEFITS

- 1000 BTU/hr capacity delivers industry's most energy efficient cool down; indoors or outdoors
- Up to 70% faster cooling speeds than leading competitor
- Variable speed compressor minimizes sound; up to 30% quieter than competitors
- Commercial-grade all stainless steel interior and exterior provides superior durability and easy cleaning
- Perlick Anti-Condensation System™ eliminates condensation from forming on the cabinet (Outdoor and Marine models only)
- Marine & Coastal Grade with Perlick Armor™ upgrades stainless steel, fasteners, and refrigeration system to the highest blend of corrosion resistance and food safety

Quick Features:

- Industry's best full 6 year warranty for owner ease of mind
- Available with stainless steel or panel ready drawers to match your design style
- Audible door alarm warns user if drawer is held open
- White LED task lighting
- R600a Natural Refrigerant offers maximum energy efficiency with zero ozone depletion potential
- Smooth glide self closing drawers offer high storage capacity



24" SIGNATURE SERIES
Freezer Drawers

MODEL NUMBERS		HP24FS	HP24FO	HP24FM
MODEL DESCRIPTION		24" Indoor Freezer Drawers	24" Outdoor Freezer Drawers	24" Marine/Coastal Freezer Drawers
ATTRIBUTES				
Perlick Anti-Condensation System		NO	YES	YES
Perlick Armor™		NO	NO	YES
OVERALL DIMENSIONS	Width - in. (mm)	23-7/8" (606 mm.)	23-7/8" (606 mm.)	23-7/8" (606 mm.)
	Depth - in. (mm)	24" (610 mm.)	24" (610 mm.)	24" (610 mm.)
	Height - in. (mm)	34-1/4" (870 mm.)	34-1/4" (870 mm.)	34-1/4" (870 mm.)
OPENING DIMENSIONS	Width - in. (mm)	24" (610 mm.)	24" (610 mm.)	24" (610 mm.)
	Depth - in. (mm)	24-7/8" (632 mm.)	24-7/8" (632 mm.)	24-7/8" (632 mm.)
	Height - in. (mm)	34-1/2" (876 mm.)	34-1/2" (876 mm.)	34-1/2" (876 mm.)
INTERNAL VOLUME Net. Cu. Ft.		5.0 cu. ft.	5.0 cu. ft.	5.0 cu. ft.
SHIPPING WEIGHT Lbs. (kg.)		144 lbs (100.7 kg.)	144 lbs (100.7 kg.)	144 lbs (100.7 kg.)
ELECTRICAL SPECIFICATIONS	Electrical Supply	115 VAC/60 Hz/1 Ph	115 VAC/60 Hz/1 Ph	115 VAC/60 Hz/1 Ph
	Running Load Amps	2.2 amps	2.2 amps	2.2 amps
	Electrical Connection	Cord connected	Cord connected	Cord connected
	Cord Plug Type	NEMA 3 Prong 5-15P	NEMA 3 Prong 5-15P	NEMA 3 Prong 5-15P
	Cord Length	6'	6'	6'
	Defrost Initiation	Time	Time	Time
	Defrost Type	Hot Gas	Hot Gas	Hot Gas
	Thermostat	Digital	Digital	Digital
	Lighting Type	LED	LED	LED
REFRIGERATION SPECIFICATIONS	Refrigerant	R600a (57g)	R600a (57g)	R600a (57g)
	Expansion Device	Capillary Tube	Capillary Tube	Capillary Tube
	Temperature Settings F°(C°)	-10° (-23.3°) - 10° (-12.2°) Factory Set Point 0° (-17.8°)	-10° (-23.3°) - 10° (-12.2°) Factory Set Point 0° (-17.8°)	-10° (-23.3°) - 10° (-12.2°) Factory Set Point 0° (-17.8°)
	Heat Rejection (at 75°F)	700 BTU/hr	700 BTU/hr	700 BTU/hr
	Pull Down Capacity	1000 BTU/hr	1000 BTU/hr	1000 BTU/hr
	Front Vented	Yes	Yes	Yes
PLUMBING		None Required	None Required	None Required

Installation Notes: To achieve 24" install depth, place electrical connection adjacent to the installation cavity.

ACCESSORIES

MODEL NOS.	DESCRIPTION
(DL)	Factory Installed Lock
66736	Caster Kit for HP24/HC24/HA24 models
67969	24" Stainless Steel Drawer Dividers
RK24DP	24" Drawer Prep Station Tray


Perlick accessories are available for purchase through an authorized Perlick dealer. For a full list of accessories and to find a dealer near you, visit perlick.com.



24" SIGNATURE SERIES

Freezer Drawers

	CUSTOMER MODEL NUMBER	REGULATORY MODEL NUMBER	Hinge Side	Lock
INDOOR	HP24FS-4-5	HP24FS4B-00-EDF0D	Drawers	No
	HP24FS-4-6	HP24FS4B-00-DD00D	Drawers	No
	HP24FS-4-5DL	HP24FS4B-00-EDFLD	Drawers	Yes
	HP24FS-4-6DL	HP24FS4B-00-DD0LD	Drawers	Yes
OUTDOOR	HP24FO-4-5	HP24FO4B-00-EDF0D	Drawers	No
	HP24FO-4-6	HP24FO4B-00-DD00D	Drawers	No
	HP24FO-4-5DL	HP24FO4B-00-EDFLD	Drawers	Yes
	HP24FO-4-6DL	HP24FO4B-00-DD0LD	Drawers	Yes
MARINE & COASTAL	HP24FM-4-5	HP24FM4B-00-QDF0D	Drawers	No
	HP24FM-4-6	HP24FM4B-00-DD00D	Drawers	No
	HP24FM-4-5DL	HP24FM4B-00-QDFLD	Drawers	Yes
	HP24FM-4-6DL	HP24FM4B-00-DD0LD	Drawers	Yes

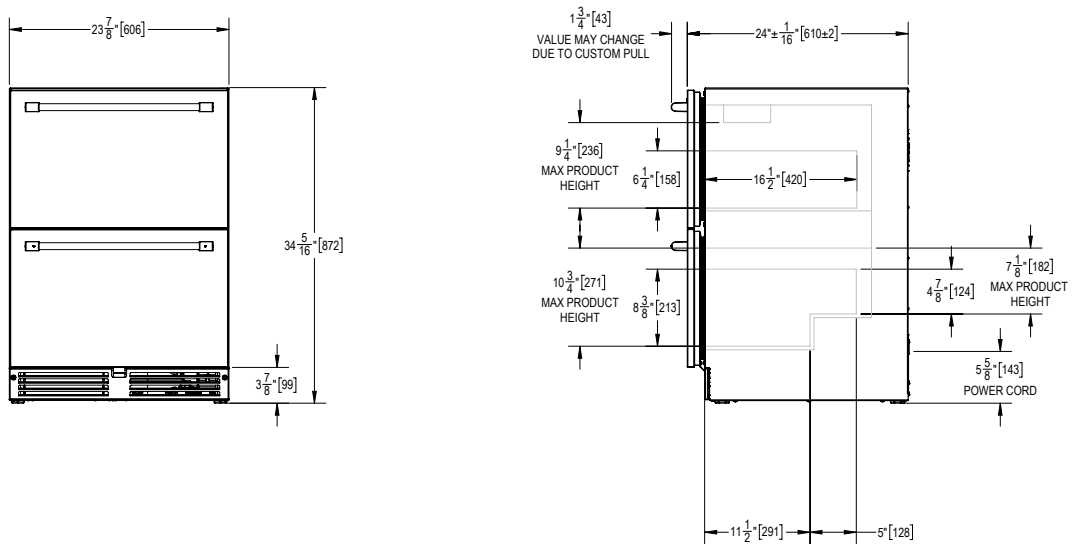

50" AREA IN WHICH ELECTRICAL OUTLET MUST BE LOCATED

